

CONSTANT FLOW REGULATOR

Model 2850



Constant flow regulator 2850 equipped
with model LH flow meter

The Model 2850 constant flow regulator is designed to provide constant flow of liquids or gases regardless of pressure variations. It is intended for low liquid flows in applications where supply or backpressure varies and for gas flows in applications where backpressure varies.

The regulator is a membrane type differential pressure controller which is usually supplied with model L variable area flow meter.

FEATURES

- Reliable operation
- Stainless steel construction
- Two piece construction, easy maintenance
- Competitively priced
- Model L flow meter for flow rate setting and monitoring

TYPICAL APPLICATIONS

- Control of sealwaters
- Control of flushwaters
- Water / Air purging
- Level measurement in tanks

ACCESSORIES

- Thread adapters

INGENIERIA SCANDIMEX LIMITADA
Av. Lib. B. O'Higgins 240, Of.81, Stgo. - Chile
Tel.: (56-2) 222 15 76 Fax: (56-2) 222 27 45
info@scandimex.cl // www.scandimex.cl

2850





Technical data 2850

Max. flow	3 l/min H ₂ O (100 NI/min Air at 6 barg)
Nominal flow	2,3 l/min H ₂ O (100 NI/min Air at 6 barg)
Max. diff. pressure	20 bar
Max. static pressure	20 bar (30 bar / 30 °C)
Pressure drop at nominal flow	2 bar
Max. temperature	75°C (*80 °C)
Body	AISI 316
Spring	AISI 316
Membrane	EPDM
Seals	Nitrile
Mesh	PTFE
Connections	BSP 1/4" or NPT 1/4"
Installation position	Vertically
Weight	950 g

*) Special construction on request

2850 -	/	
		Options
	L	Pipe kit for connecting to model L flow meter
		Connections
		BSP 1/4"
	N	NPT 1/4"

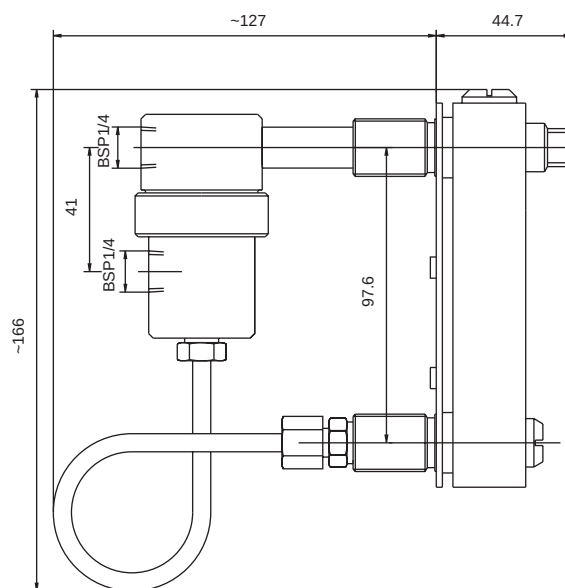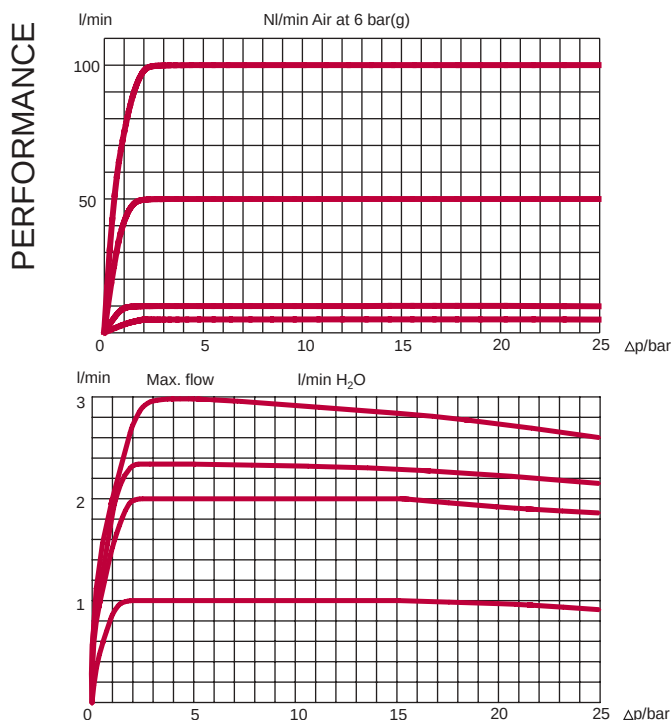

MANUFACTURER

Kytola
INSTRUMENTS

KYTOLA OY • Olli Kytolan tie 1
P.O. Box 5 • FI-40951 MUURAME • FINLAND
Phone +358 14 339 0600 • Fax +358 14 631 419
E-mail sales@kytola.com • www.kytola.com

LOCAL
REPRESENTATIVE

INGENIERIA SCANDIMEX LIMITADA
Av. Lib. B. O'Higgins 240, Of.81, Stgo. - Chile
Tel.: (56-2) 222 15 76 Fax: (56-2) 222 27 45
info@scandimex.cl // www.scandimex.cl