

KYTOLA® Model V Variable Area Flow Meter is designed for reliable measuring and monitoring of liquid and gas flows.

It comes in a range of different options and offers a choice of end blocks – aluminium, stainless steel AISI 316 or polyamide.



- Sturdy construction
- Impact resistant flow tube
- Model VE in multi-tube versions
- Scales for alternative liquids and gases

ISO 9001:2008 ISO 14001:2004

FLOW METER VD, VE, VL



22 222 1576 | 22 222 2745 | 9 982 72 932
info@scandimex.cl | www.scandimex.cl
Avda. Lib. Bdo. O'Higgins 240, of. 81. Santiago

FEATURES

Large selection of materials

Alarm-ready

Models VD and VE with built-in flow adjustment valve and quick change flow tube

TYPICAL APPLICATIONS

Lubrication oil measurement

Sealing and cooling water measurement

Flush water applications

Gas flow measurements

OPTIONS

Low and high flow alarm

Constant flow regulator

Viton or EPDM seals

PES flow tube

Model	VDA	VDH	VDK
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight	0.75 kg	2.00 kg	0.95 kg
Valve housing	Aluminium	AISI 316	AISI 316
Valve spindle	AISI 316	AISI 316	AISI 316
Flow tube	Grilamid (PA-12) (*PES)		
Connections	BSP 1/2" or NPT 1/2"		
Float	AISI 329 or AISI 329/PTFE (depending on range)		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +20°C)		
*Special construction on request			

VD

End Block MaterialAluminium (not for H₂O)

A

AISI 316

H

Nylon

K

Flow RangeH₂O

Air

0.4 – 2	L/min	15 – 75	NL/min	6H
0.75 – 3	L/min	30 – 130	NL/min	3H
1.5 – 5	L/min	40 – 180	NL/min	3K
2 – 9	L/min	80 – 280	NL/min	3L
2.5 – 10	L/min	75 – 325	NL/min	3M
3 – 16	L/min	100 – 600	NL/min	4N
4 – 17	L/min	100 – 650	NL/min	4D
4 – 22	L/min	100 – 1100	NL/min	4E
7.5 – 32.5	L/min	–		4F

ScaleH₂O (L/min) at +20°C

A

Air (NL/min) at +20°C/1.013 bar (abs)

R

Special Feature

Alarm readiness

D

Hand knob in valve

H

BSP connections

blank

NPT connections

N

Grilamid flow tube, nitrile seals

blank

PES flow tube, nitrile seals

V

PES flow tube, Viton® seals


W

Grilamid flow tube, Viton® seals

X

Standard feature: leave blank

Special feature: choose Character

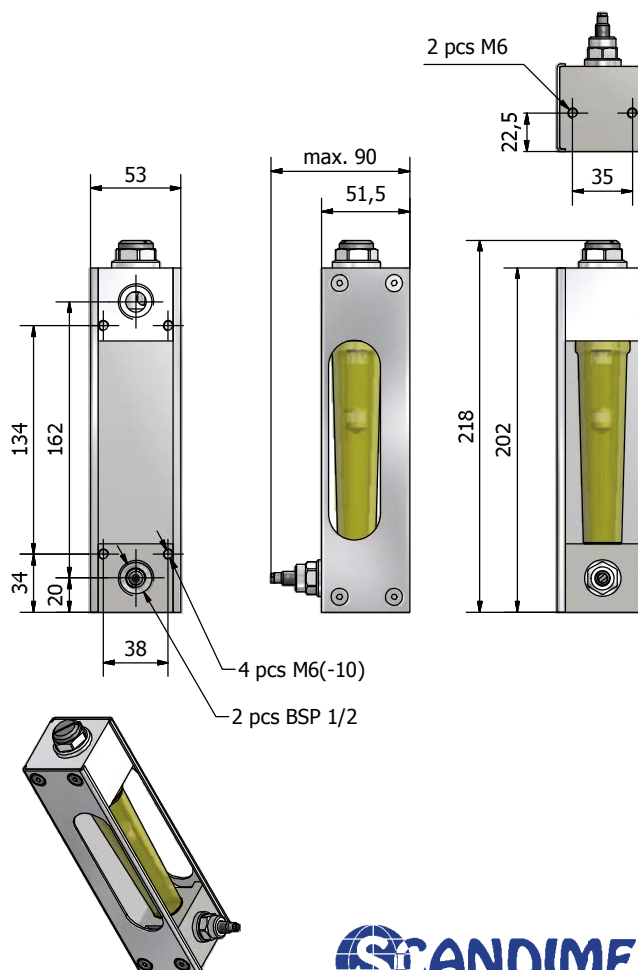

SCANDIMEX
INGENIERIA

22 222 1576 | 22 222 2745 | 9 982 72 932

info@scandimex.cl | www.scandimex.cl

Avda. Lib. Edo. O'Higgins 240, of. 81. Santiago

Kytola
INSTRUMENTS

www.kytola.com



Kytola Instruments Oy

Olli Kytölän tie 1

FI-40950 Muurame, Finland

Tel. +358 20 779 0690


Fax +358 14 631 419

E-mail info@kytola.com

Model	VEA	VEH	VEK
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight	0.75 kg	2.00 kg	0.95 kg
Valve housing	Aluminium	AISI 316	AISI 316
Valve spindle	AISI 316	AISI 316	AISI 316
Flow tube	Grilamid (PA-12) (*PES)		
Connections	BSP 1/2" or NPT 1/2"		
Float	AISI 329 or AISI 329/PTFE (depending on range)		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +20°C)		
*Special construction on request			

VE					-		-	
End Block Material								
Aluminium (not for H ₂ O)					A			
AISI 316					H			
Nylon					K			
Flow Range								
H₂O		Air						
0.4 – 2	L/min	15 – 70	NL/min	6H*				
0.75 – 3	L/min	30 – 130	NL/min	3H*				
1.5 – 5	L/min	40 – 170	NL/min	3K*				
2 – 9	L/min	60 – 260	NL/min	3L*				
2.5 – 10	L/min	75 – 300	NL/min	3M*				
2 – 15	L/min	75 – 400	NL/min	4N*				
4 – 17	L/min	100 – 450	NL/min	4D*				
4 – 22	L/min	100 – 650	NL/min	4E*				
5 – 30	L/min	150 – 700	NL/min	4F*				
Scale								
H ₂ O (L/min) at +20°C					A			
Air (NL/min) at +20°C/1.013 bar (abs)					R			
Special Feature								
Alarm readiness								D
BSP connections							<i>blank</i>	
NPT connections								N
Grilamid flow tube, nitrile seals							<i>blank</i>	
PES flow tube, nitrile seals								V
PES flow tube, Viton® seals								W
Grilamid flow tube, Viton® seals								X
Standard feature: leave <i>blank</i>								
Special feature: choose Character								

* Air flow ranges (20°C/1.013 bar abs) for calibration purposes only

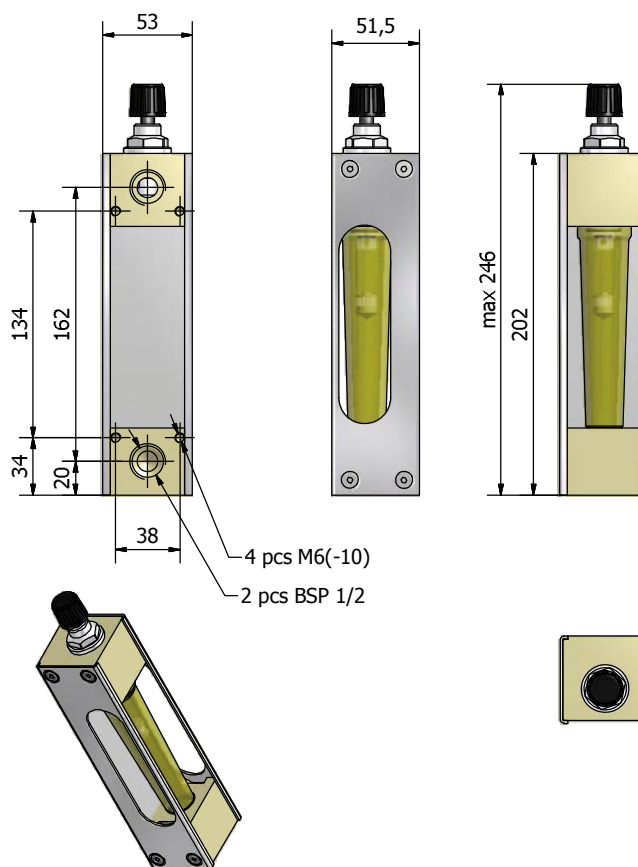

SCANDIMEX
INGENIERIA

22 222 1576 | 22 222 2745 | 9 982 72 931
info@scandimex.cl | www.scandimex.cl

Avda. Lib. Edo. O'Higgins 240, of. 81. Santiago

Model	VLA	VLH	VLK
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight	0.75 kg	2.00 kg	0.95 kg
Flow tube	Grilamid (PA-12) (*PES)		
Connections	BSP 1/2" or NPT 1/2"		
Float	AISI 329 or AISI 329/PTFE (depending on range) Note! Other possible wetted metal parts: AISI 316		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +20°C)		
*Special construction on request			

VL - - **End Block Material**Aluminium (not for H₂O)**A**

AISI 316

H

Nylon

K**Flow Range**H₂O

Air

0.4 – 2	L/min	15 – 75	NL/min	6H
0.75 – 3.25	L/min	30 – 130	NL/min	3H
1.5 – 5.5	L/min	40 – 180	NL/min	3K
2 – 9	L/min	80 – 300	NL/min	3L
3 – 10	L/min	75 – 325	NL/min	3M
2 – 16	L/min	75 – 450	NL/min	4N
3 – 17	L/min	100 – 500	NL/min	4D
4 – 22	L/min	100 – 700	NL/min	4E
5 – 30	L/min	150 – 900	NL/min	4F

ScaleH₂O (L/min) at +20°C**A**

Air (NL/min) at +20°C/1.013 bar (abs)

R**Special Feature**

Alarm readiness

D

BSP connections

blank

NPT connections

N

Grilamid flow tube, nitrile seals

blank


PES flow tube, nitrile seals

V

PES flow tube, Viton® seals

W

Grilamid flow tube, Viton® seals

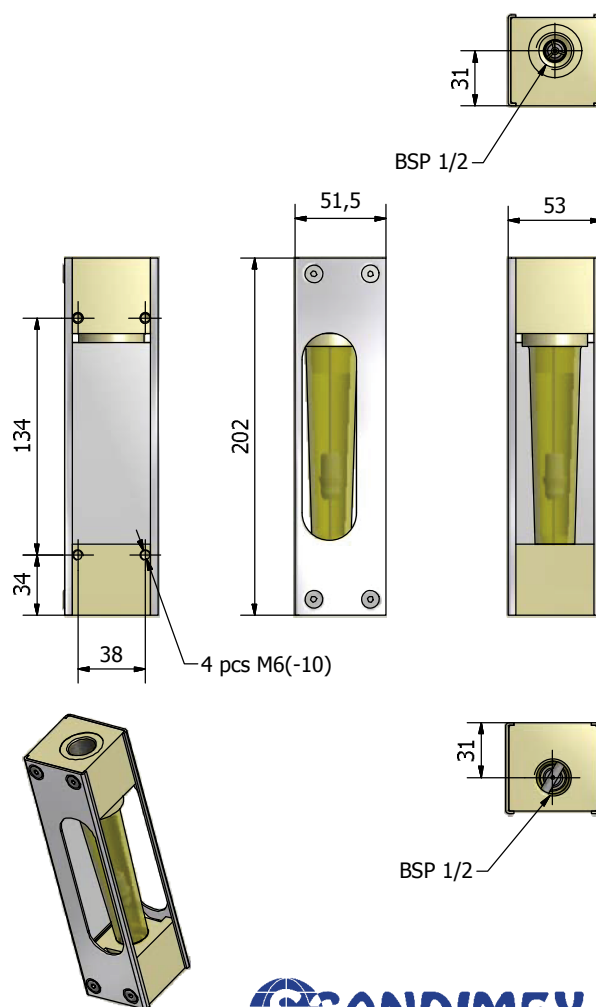XStandard feature: leave blank
Special feature: choose Character
SCANDIMEX
INGENIERIA

 22 222 1576 | 22 222 2745 | 9 982 72 932
 info@scandimex.cl | www.scandimex.cl
 Avda. Lib. Edo. O'Higgins 240, of. 81. Santiago

Kytola
INSTRUMENTS

www.kytola.com

**Kytola Instruments Oy**

Olli Kytölän tie 1

FI-40950 Muurame, Finland

Tel. +358 20 779 0690

Fax +358 14 631 419

E-mail info@kytola.com